


KemTab Vibro

- » For high requirements
- » Vibration conveyor

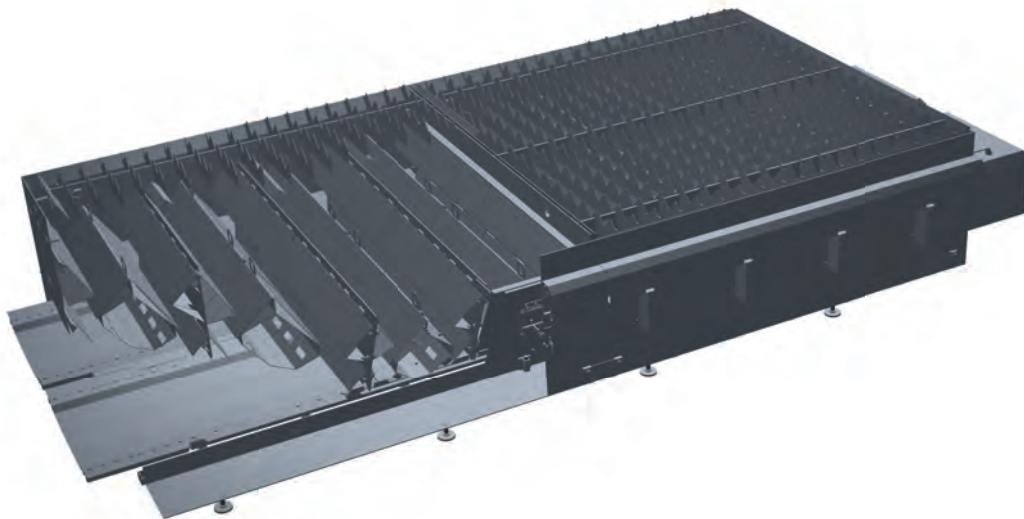

Applications

- » For plasma cutting up to 400 amps (short peaks 450 A)
- » For gas cutting with sheet metal up to 150 mm thick

Properties

- » Automatic discharge of slag by vibration conveyor
- » Low extraction volume
- » Standard material support or easyFRAME
- » Various pneumatic control options of the extraction damper in the individual table segments
- » Exterior pneumatic system
- » Air flow and mechanical system are separated from each other
- » Modular design

Technical Data

Basic data

Module widths	2.100 mm, 2.600 mm, 3.100 mm, 4.200 mm, 5.200 mm
Table height	850 mm
Material support frame	EasyFrame Advance

Benefits

- » Better utilization and efficiency of the cutting system due to automatic waste discharge and therefore minimal downtime for cleaning
- » Better cut quality and less wear due to innovative design of the material support easyFRAME
- » No external follow-up costs caused by in-house production of wear parts due to easyFRAME
- » No cleaning or maintenance required on the material support as it can be easily replaced (easyFRAME)
- » Energy cost savings due to low extraction volume thanks to individual control of the extraction dampers of the segment in use
- » No mechanical influence of the cutting system in non-contact electronic-pneumatic control of the extraction dampers
- » Low wear on the pneumatic system since it is separated from the air stream